




Slotted Ceramic Cased, Axial

Series PGMA

Key Features

- 4W to 17W Power Rating.
- Ceramic Encased, Axial Leaded.
- High Insulation Resistance.
- High Surge Versions.
- Low Surface Temperature.
- Slotted Ceramic Housing.
- Reference Standards.
 - IEC 115-1

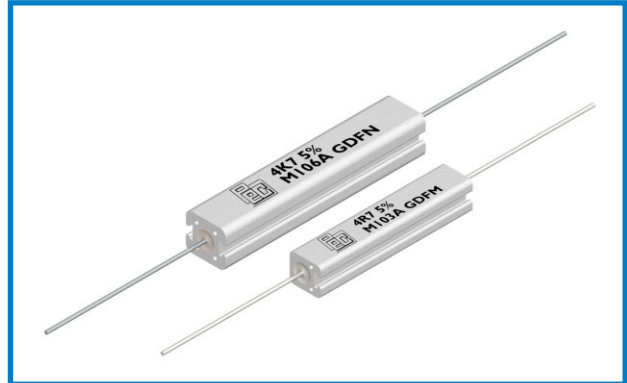


Electrical Specifications and Environmental Characteristics

Type	Power @70°C Watts	Ohmic Range Ohms		Additional Specifications	
		Min	Max	Tolerance	Standard $\leq 10\Omega \pm 10\%$, $>10\Omega \pm 5\%$, On Request $\pm 2\%$
M101A	4	0R1	6K8	Applicable E-Series	E24(5%), E12(10%); Other Values on Request
M102A	5	0R33	10K	Derating	From 70°C to 350°C
M103A	7	0R47	22K	TCR -Low Values, IEC 115-1, Cl 4.8.4.2, 2.2.20.2	450ppm/°C (Max)
M104A	7	0R33	10K	TCR -Mid Values & High Values	Std.: <150ppm/°C; On Request: 50, 20ppm/°C
M105A	9	0R47	22K	Temperature Range	-55°C to 350°C
M106A	11	0R82	22K	Climatic Category	55 / 200 / 56
M107A	17	1R5	27K	Solvent Resistance	As per IEC 115-1, Clause 4.30 (Test XA of IEC 68-2-45)


Performance Characteristics

Test Methods	Test Conditions	Test Limits
Insulation Resistance	Applying 500V DC, IEC 115-1, Clauses-4.6, 2.2.19	10000 M Ω
Dielectric Strength	2000V _{peak} for 1 min, IEC 115-1, Clause 2.2.17	No Breakdown
Terminal Strength	Tensile Test, IEC 115-1, Clause 4.16, Test Ua ₁ , IEC 68-2-21	>50N
Solderability	As per MIL-STD 202F, Test 208; IEC 115-1, Clause 4.17.3	95% Coverage
Endurance at Rated Temperature	Rated Power @70°C(1.5hrs ON, 0.5hrs OFF), IEC 115-1, Clause 4.25	$\Delta R < 5\% + 0R05$
Long Term Damp Heat	90-95% RH@40°C Ambient Tempr. for 56days, IEC 115-1, Clause 4.24	$\Delta R < 5\% + 0R05$
Resistance to Soldering Heat	10 Seconds Dip in Solder Bath at 260°C, IEC 115-1, Clause 4.18	$\Delta R < 1\% + 0R05$
Climatic Sequence	As per IEC 115-1, Clause 4.23	$\Delta R < 5\% + 0R05$

Temperature Rise Graphs

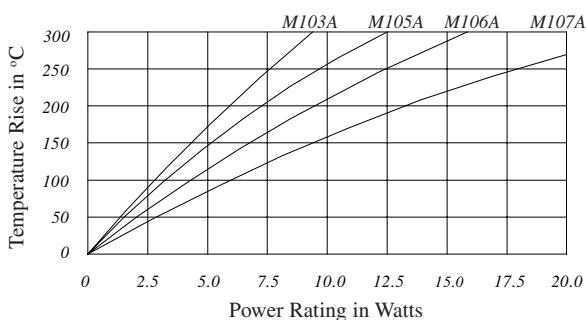




Derating Curve²

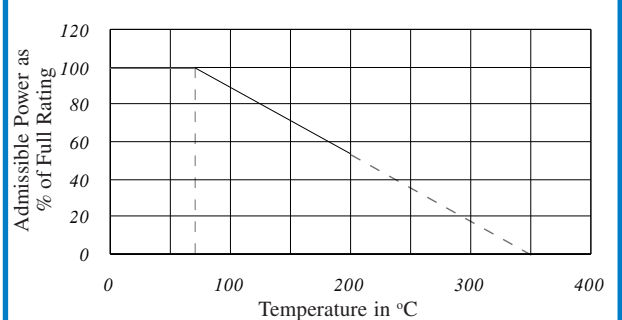

Dimensions

For M104A, M105A,
M106A, M107A

For M101A,
M102A, M103A

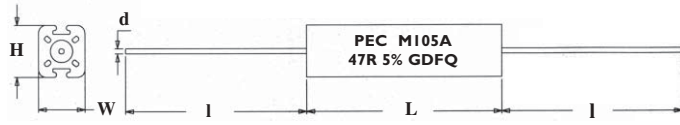

Do not Scale Drawings. All dimensional tolerances in mm.

Dimensions (mm)

Type	L	W	H	I	d
		± 0.5	± 0.5	± 3.0	± 0.05
M101A	20.0 ± 1.0	7.0	8.0	36.0	0.80
M102A	25.0 ± 1.0	7.0	8.0	36.0	0.80
M103A	38.0 ± 1.0	7.0	8.0	36.0	0.80
M104A	25.0 ± 1.0	9.0	10.0	36.0	0.80
M105A	38.0 ± 1.0	9.0	10.0	36.0	0.80
M106A	50.0 ± 1.5	9.0	10.0	36.0	0.80
M107A	75.0 ± 2.0	9.0	10.0	36.0	0.80

Dimensions (Inches)

Type	L	W	H	I	d
		± 0.02	± 0.02	± 0.118	± 0.002
M101A	0.787 ± 0.039	0.276	0.315	1.417	0.0314
M102A	0.984 ± 0.039	0.276	0.315	1.417	0.0314
M103A	1.496 ± 0.039	0.276	0.315	1.417	0.0314
M104A	0.984 ± 0.039	0.354	0.394	1.417	0.0314
M105A	1.496 ± 0.039	0.354	0.394	1.417	0.0314
M106A	1.968 ± 0.059	0.354	0.394	1.417	0.0314
M107A	2.953 ± 0.079	0.354	0.394	1.417	0.0314

To Order - Please Specify

PEC Type.	Ohmic Value	Tolerance	Packing Style	Release Condition	Standard / Non-Std. Leads	TCR
M105A	0.1 Ohm » OR1 / R10 1 Ohm » 1R0 1 KOhm » 1K0 10.7 KOhm » 10K7	2% » G 5% » J 10% » K	Bulk » B	Commercial » X	Standard » S 38mm / 1.5" » L Others » M	Standard » S Others » M Please Specify

A Sample Part No.: **M105A 47R JBXSS**

Notes


- On request we undertake tests for Batch Acceptance to a specified Reference Standard.
- The Derating Curve specifies the maximum allowable Power at a particular ambient temperature while ensuring that the maximum surface temperature remains within the designed limit.
- When the Resistor is subjected to a Pulse Load, please ensure that the *average* Power dissipated remains below the rated Power specified.
- Resistor performance with Pulse Loads will have to be application tested. Please utilise our Pulse Application Questionnaire for selecting a suitable type or for requesting any design-in assistance from us.

Marketing Director
John A Stooke
Phone : +44 1793 737269
Mobile : +44 7836 609360
johnstooke@peccomponents.com

Global Sales Co-ordinator
K.K. Sajeev
Phone : +91 40 27126228 (Ext 213)
Mobile : +91 98666 55628
sales@peccomponents.com

European Sales
Gerhard Phalke
Phone : +49 8445 9299 755
Mobile : +49 151 55005510
pec@gerhard-pahlke.de

To offer our products through regionally trusted services we have territory-wise and product-wise distribution, franchising, resale and private brand labelling arrangements. For cost-effective and enduring solutions to your needs, for tailored stocking/delivery scheduling, logistics and administrative support, please do not hesitate to contact us or any of our associated representatives, coordinators and product specialists.

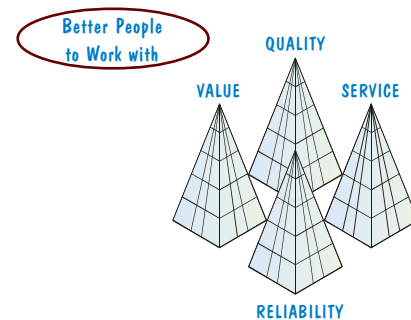

Thoughtful engineering and production by a well trained work-force, backed by strong design and development skills, enable us to maintain a level of manufacture and service recognised internationally.
At PEC we offer well-tuned customised support.